



DISPLACEMENT

DCTH Series DC to DC LVDT Displacement Transducer

- High cycle life
- Stainless steel
- High accuracy
- High resolution
- Voltage / 4-20mA output




These transducers are for displacement / position measurement. They make an accurate position measurement of the movement of the armature (the sliding part) relative to the body of the displacement transducer.

This transducer uses the Linear Variable Differential Transformer (LVDT) principle which means that it is probably the most robust and reliable position sensor type available. The strength of the LVDT sensor's principle is that there is no electrical contact across the transducer position sensing element which for the user of the sensor means clean data, infinite resolution and a very long life.

Our DC to DC LVDT transducer has all of the benefits of the LVDT sensor principle with the added convenience of built-in LVDT electronics enabling a dc supply and dc output. As an option we can offer a 4-20mA 2 wire connection to the transducer on some models.

This series of displacement transducer is available as either an unguided, captive or spring return version.

Captive guided version.

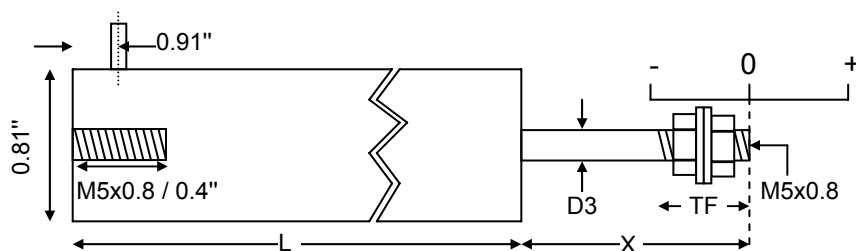


Our captive guided displacement transducer has bearings to guide the armature inside the measurement sensor. Captive LVDTs are for position measurement applications where guidance may be poor and end bearings may be required.


Type	Range	Linearity error (% F.S.)	L	X	D3	Total weight	TF	Inward over-travel	Outward over-travel
DCTH500C	±12.5mm (±0.5")	<±0.5/±0.25/±0.1	7.6"	1.5"	0.187"	12oz	0.6"	0.39"	0.47"
DCTH1000C	±25mm (±1")	<±0.5/±0.25/±0.1	8.7"	2.5"	0.187"	14oz	0.6"	0.51"	0.39"
DCTH2000C	±50mm (±2")	<±0.5/±0.25/±0.1	13.2"	3.0"	0.187"	1.1lb	0.6"	0.39"	0.55"
DCTH3000C	±75mm (±3")	<±0.5/±0.25/±0.1	17.6"	4.5"	0.187"	1.4lb	0.6"	0.94"	0.6"
DCTH4000C	±100mm (±4")	<±0.5/±0.25/±0.1	19.4"	5.0"	0.187"	1.7lb	0.6"	0.31"	0.6"
DCTH6000C	±150mm (±6")	<±0.5/±0.25	26.9"	7.0"	0.187"	2.3lb	0.6"	0.47"	0.67"
DCTH8000C	±200mm (±8")	<±0.5/±0.25	34.4"	10.0"	0.187"	3.2lb	1.3"	0.87"	0.98"
DCTH10000C	±250mm (±10")	<±0.5/±0.25	42.0"	12.0"	0.187"	3.7lb	1.1"	1.34"	1.38"
DCTH15000C	±375mm (±15")	<±0.5	58.0"	16.0"	0.187"	4.9lb	0.8"	0.51"	0.51"
DCTH18500C	±470mm (±18.5")	<±0.5	68.5"	20.0"	0.236"	5.8lb	1.1"	0.20"	1.30"

Unguided version.

DCTH100 to DCTH400

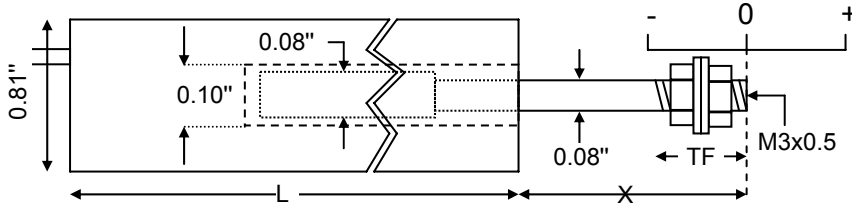

DCTH500 to DCTH8000

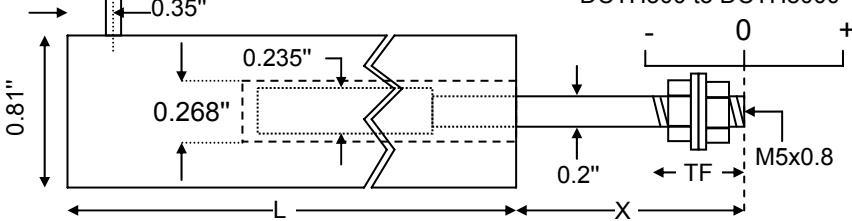


Type	Range	Linearity error (% F.S.)	L	X	Total weight	Armature weight	TF	Inward over-travel
DCTH100	±2.5mm (±0.1")	<±0.5/±0.25/±0.1	2.5"	1.3"	2.6oz	0.05oz	0.7"	0.46"
DCTH200	±5mm (±0.2")	<±0.5/±0.25/±0.1	2.5"	1.3"	2.6oz	0.06oz	0.7"	0.35"
DCTH300	±7.5mm (±0.3")	<±0.5/±0.25/±0.1	2.5"	1.3"	2.6oz	0.06oz	0.7"	0.26"
DCTH400	±10mm (±0.4")	<±0.5/±0.25	2.5"	1.3"	2.6oz	0.07oz	0.7"	0.15"
DCTH500	±12.5mm (±0.5")	<±0.5/±0.25/±0.1	6.9"	1.7"	8oz	0.6oz	0.6"	0.63"
DCTH1000	±25mm (±1")	<±0.5/±0.25/±0.1	8.0"	2.7"	10oz	0.8oz	0.6"	0.87"
DCTH2000	±50mm (±2")	<±0.5/±0.25/±0.1	12.5"	3.2"	13oz	1.3oz	0.6"	0.63"
DCTH3000	±75mm (±3")	<±0.5/±0.25/±0.1	16.9"	4.7"	1.1lb	1.9oz	0.6"	1.14"
DCTH4000	±100mm (±4")	<±0.5/±0.25/±0.1	18.7"	5.2"	1.4lb	2.5oz	0.6"	0.63"
DCTH6000	±150mm (±6")	<±0.5/±0.25	26.2"	7.2"	1.9lb	3.5oz	0.6"	0.63"
DCTH8000	±200mm (±8")	<±0.5/±0.25	33.7"	10.2"	2.8lb	4.9oz	1.2"	1.06"


On our unguided LVDTs the armature assembly is a separate component, to make a measurement the user must guide the armature inside the body without touching the sides. Unguided position measurement transducers are appropriate where external guidance is available and give truly non-contact operation

Spring return version.

DCTH100AG to DCTH400AG

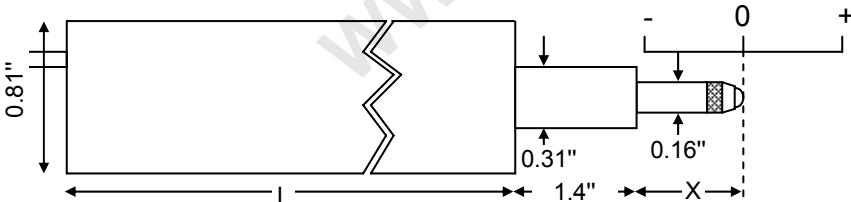

DCTH500A to DCTH3000A

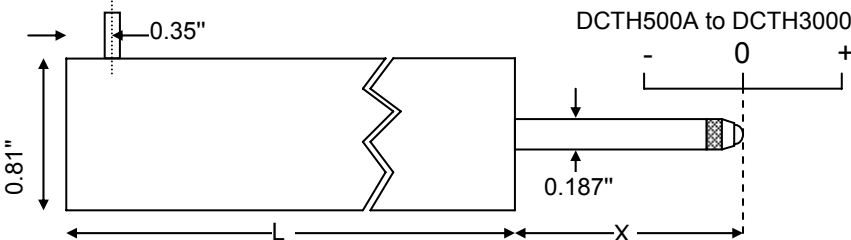

Our spring displacement transducer has bearings to guide the armature inside the measurement sensor and a spring which pushes the armature to the fully out position. Spring return LVDTs are appropriate where it is not possible to connect the transducer armature to the moving component being measured.

Type	Range	Linearity error (% F.S.)	L	X	Total weight	Spring force at X	Spring rate	Inward over-travel	Outward over-travel
DCTH100AG	±2.5mm (±0.1")	<±0.5/±0.25/±0.1	2.5"	0.5"	2.9oz	4oz.	8.5oz/inch	0.09"	0.05"
DCTH200AG	±5mm (±0.2")	<±0.5/±0.25/±0.1	2.5"	0.5"	2.9oz	4oz.	7.1oz/inch	0.01"	0.05"
DCTH300AG	±7.5mm (±0.3")	<±0.5/±0.25/±0.1	2.5"	0.7"	2.9oz	5oz.	5.8oz/inch	0.06"	0.05"
DCTH400AG	±10mm (±0.4")	<±0.5/±0.25	2.5"	0.9"	2.9oz	6oz.	7.2oz/inch	0.05"	0.05"
DCTH500A	±12.5mm (±0.5")	<±0.5/±0.25/±0.1	7.2"	1.5"	8oz	4.6oz	2.0oz/inch	0.04"	0.51"
DCTH1000A	±25mm (±1")	<±0.5/±0.25/±0.1	8.3"	2.5"	10oz	7.2oz	3.0oz/inch	0.12"	0.39"
DCTH2000A	±50mm (±2")	<±0.5/±0.25/±0.1	12.8"	3.0"	14oz	6oz	1.8oz/inch	0.31"	0.55"
DCTH3000A	±75mm (±3")	<±0.5/±0.25/±0.1	17.2"	4.5"	1.1lb	1lbs	3.2oz/inch	0.59"	0.59"

Specification		
V output	Supply voltage (dual)	±12V to ±20V dc, 30mA
	Supply voltage (single, must be floating)	24V to 40V dc, 30mA
	Change in output for change in supply	5mV/V
	Output load	10kOhms
	Output ripple	30mV (peak-to-peak)
	Electrical output bandwidth	200Hz
	Output impedance	2 Ohms
	Operating temperature range	-58°F to 176°F
4-20mA output ($\geq \pm 12.5\text{mm}$ ($\pm 0.5''$))	Supply voltage	12V to 36V dc
	Max loop resistance	(Supply voltage-11) x 50 Ohms
	Output ripple	50uA (peak-to-peak)
	Electrical output bandwidth	200Hz
	Operating temperature range	14°F to 158°F
Both outputs	Temperature coefficient (zero)	±0.006% F.S. /°F (typical)
	Temperature coefficient (span)	±0.017% F.S. /°F (typical)
	Electrical termination	6.6ft (integral cable) Longer available to order.

Output details (outputs 1 and 2 selected using different connections)				
Option code	Note	- position	0	+ position
Standard	Output 1	0V	5V	10V (+0% - 5%)
Standard	Output 2	-5V (+0% - 5%)	0V	+5V (+0% - 5%)
TM0627	Output 1	10V (+0% - 5%)	5V	0V
TM0627	Output 2	+5V (+0% - 5%)	0V	-5V (+0% - 5%)
TM0321A	$\geq \pm 12.5\text{mm}$ ($\pm 0.5''$)	4mA	12mA	20mA
TM0321B	$\geq \pm 12.5\text{mm}$ ($\pm 0.5''$)	20mA	12mA	4mA

All dimensions and specifications are nominal.

Due to our policy of on-going development, specifications may change without notice. Any modification may affect some or all of the specifications for our equipment.

RDP Electrosense
 2216 Pottstown Pike
 Pottstown, PA 19465
 USA
 Tel: 610-469-0850
 Tel: 800-334-5838
 Fax: 610-469-0852
 Email: info@rdpe.com