

Digital Miniature Double Ended Beam



DESCRIPTION

The MDBD is designed for truck and rail scales in high capacities with low profile. The design of loading through a ball is insensitive to side load.

The MDBD is constructed of alloy steel and is fully potted and sealed with special chemical compounds to IP67 providing excellent protection against water and moisture attack.

The digital output enables the user to communicate with each MDBD independently of the others in the system, thus offering advantages in system setup, system control, corner correction, fault finding and load cell replacement.


FEATURES

- Easy corner compensation of the weighbridge
- Capacities: 10 - 30t
- Digital output via RS485 or RS422 interface
- High side load tolerance
- Electroless nickel plated alloy tool steel
- Surge protection optional
- Extensive internal diagnostics
- External resolution 240,000 counts
- Internal resolution 1,000,000 counts
- Maximum transmission distance 1200m

APPLICATIONS

- Truck/rail scales
- Silo/hopper/tank weighing

OUTLINE DIMENSIONS

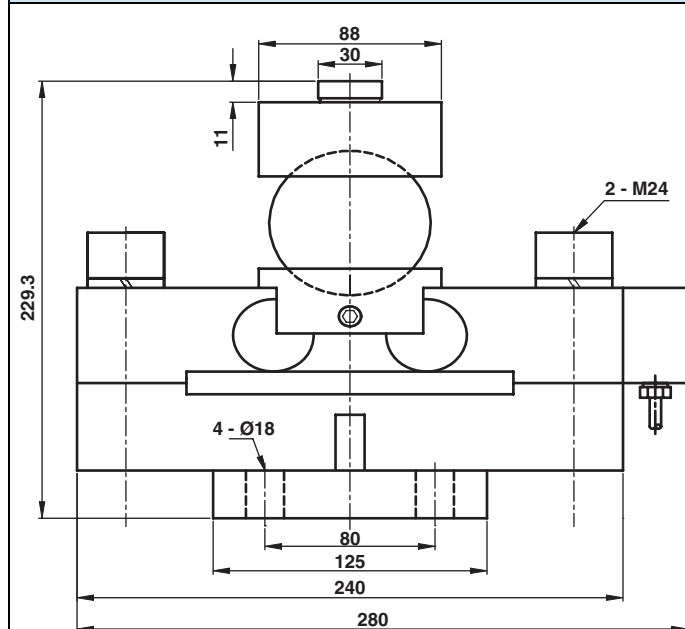

Cable specifications:

Cable length: 13.5m

Excitation +	Green
Excitation -	Black
Rx +	Yellow
Rx -	Blue
Tx +	Red
Tx -	White
Shield	Transparent

SPECIFICATIONS		
PARAMETER	VALUE	UNIT
Standard capacities (E_{max})	10, 20, 25, 30	ton
Rated output-R.O.	240,000	counts
Rated output tolerance	200	±counts
Zero balance	200	±counts
Combined error	0.0200	±% of rated output
Non-repeatability	0.0200	±% of rated output
Creep error (30 minutes)	0.03	±% of rated output
Creep error (20 - 30 minutes)	0.01	±% of rated output
Zero return (30 minutes)	0.03	±% of rated output
Temperature effect on span	0.015	±% of rated output/10°C
Temperature effect on zero	0.026	±% of rated output/10°C
Compensated temperature range	-10 to +40	°C
Operating temperature range	-40 to +80	°C
Storage temperature range	-40 to +90	°C
Minimum dead load	0	% of E_{max}
Safe dead load	150	% of E_{max}
Ultimate load	300	% of E_{max}
Excitation voltage	12.5 to 18	Vdc
Recommended excitation voltage	15	Vdc
Maximum current consumption	80	mA
Start up current	150	mA
Insulation resistance	>5000	MW
Element material	Alloy steel	
Sealing (DIN 40.050/EN60.529/IEC 529)	IP67	
Signal update per second	25	
Baudrate	9600	Bits/s
Transmission type	Asynchronous serial transmission	
Start bits	1	
Data bits	7	
Stop bits	1	
Parity	Odd	
Maximum transmission cable length	1200	m
Data transmission interface	RS422(4 communication wires)/RS485(2 communication	

All Specifications subject to change without notice.

Disclaimer

All product specifications and data are subject to change without notice.

Vishay Precision Group, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay Precision Group"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

Vishay Precision Group disclaims any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify Vishay Precision Group's terms and conditions of purchase, including but not limited to the warranty expressed therein, which apply to these products.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay Precision Group.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Vishay Precision Group products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Vishay Precision Group for any damages arising or resulting from such use or sale. Please contact authorized Vishay Precision Group personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.
