


# 型号OBBS/OBBS2系列

波纹管式称重传感器 (20kg ~ 500kg)


- 17-4PH不锈钢结构, 高精度和抗腐蚀性
- 17-4PH 不锈钢结构



**OBBS - 20~100kg**

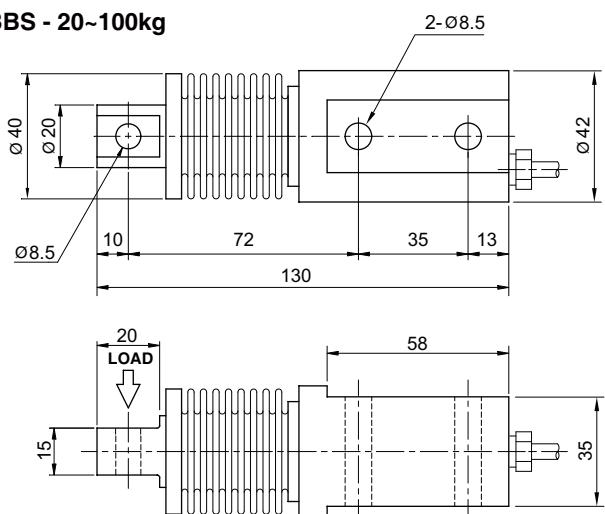

**OBBS2 - 200~500kg**

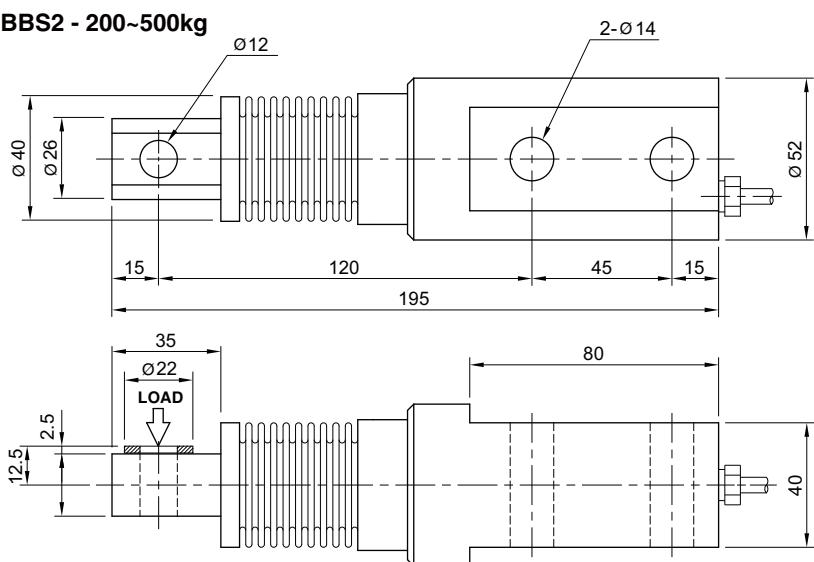

## 规格

型号	OBBS	OBBS2
额定量程 (R.C.)	20, 50, 100 kg	200, 300, 500 kg
灵敏度(R.O.)	2.0mV/V ± 0.2%	
非线性	≤0.03% R.O.	
滞后	≤0.02% R.O.	
重复性误差	≤0.02% R.O.	
蠕变误差	≤0.03% in 20min.	
零点平衡	≤1% R.O.	
温度补偿范围	-10 ~ 70°C	
工作温度范围	-20 ~ 80°C	
温度对额定输出的影响	≤0.02% LOAD/10°C	
温度对零点平衡的影响	≤0.02% R.O./10°C	
输入阻抗	400 Ohms ± 20 Ohms	
输出阻抗	350 Ohms ± 5 Ohms	
绝缘电阻 (最小)	2000 MOhms at 50V DC	
激励电压	10V(推荐), 15V(最大)	
电气连接	Ø5mmx3m(22AWG x 4Core Shielded)	
防护等级	符合IP 68	
安全过载	150% R.C	
极限过载	300% R.C	

## 订购须知

**OBBS - 50**  
 型号 量程  
 OBBS 20, 50, 100kg  
 OBBS2 200, 300, 500kg

## 接线须知

