
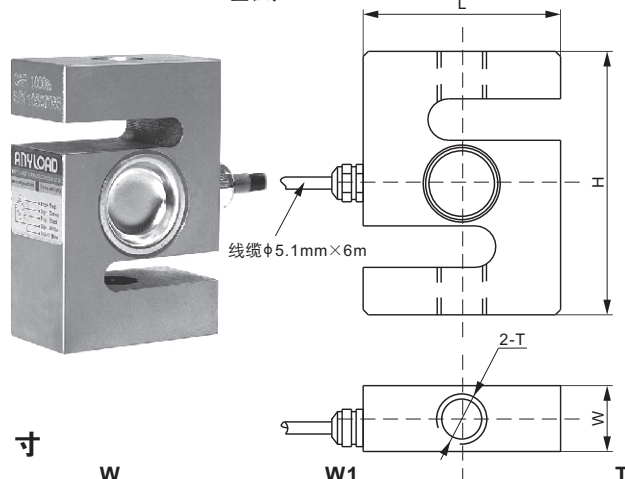


101NH

合金钢

量程: 50-500lb

量程: 1Klb-20Klb

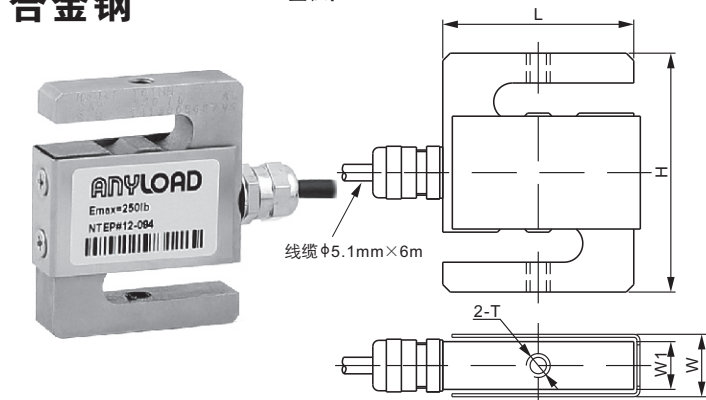

CE RoHS



尺寸

量程	H	L	W	W1	T
lb/inches					
50-250	2.50	2.00	0.65	0.50	1/4-28 UNF-2B
500	3.00	2.00	0.75	0.89	1/2-20 UNF-2B
1,000-3,000	3.00	2.00	1.11	-	1/2-20 UNF-2B
5,000; 10,000	4.00	3.00	1.00	-	3/4-16 UNF-2B
15,000	5.50	4.00	1.25	-	1-14 UNS-2B
20,000	7.00	4.92	2.00	-	1 1/4-12 UNF-2B
kg/mm (由上述尺寸转换)					
22.68-113.4	63.5	50.8	16.6	12.7	1/4-28 UNF-2B
226.8	76.2	50.8	19.1	22.6	1/2-20 UNF-2B
453.6-1,360.8	76.2	50.8	28.2	-	1/2-20 UNF-2B
2,268; 4,535.9	101.6	76.2	25.4	-	3/4-16 UNF-2B
6,803.9	139.7	101.6	31.8	-	1-14 UNS-2B
9,071.8	177.8	125.0	50.8	-	1 1/4-12 UNF-2B

技术参数

灵敏度	3.0 mV/V ± 1%	额定激励电压	10V (15V 最大)
零位输出	± 0.02 mV/V	绝缘阻抗	> 2 [50V DC] GΩ
非线性	< ± 0.017%	正常工作温度范围	-10°C - 50°C / 14°F - 122°F
重复性	< ± 0.017%	安全极限载荷	150% 满量程
滞后误差	< ± 0.017%	破坏极限载荷	300% 满量程
蠕变	< ± 0.023%	密封方式	密封 / IP67
输入阻抗	350 Ω ± 7	接线方式	Exc+ 红 Exc- 黑
输出阻抗	350 Ω ± 3		Sig+ 绿 Sig- 白
原材料	合金钢		屏蔽线

量程	货号	毛重 (kg)	可互换产品						
			Coti-Global		Rice Lake		Vishay Cेल्ट्रॉन	Vishay Revere	Vishay Sensortronics
50lb	101NH-50lb	0.6	CGSB-50lb		RL20000-50lb		STC-50lb	363-50lb	60001-50lb
100lb	101NH-100lb	0.6	CGSB-100lb		RL20000-100lb		STC-100lb	363-100lb	60001-100lb
200lb	101NH-200lb	0.6	CGSB-200lb		RL20000-200lb		STC-200lb	363-200lb	60001-200lb
250lb	101NH-250lb	0.6		CGSB-1-250lb	RL20000-250lb			363-250lb	
500lb	101NH-500lb	0.7	CGSB-500lb	CGSB-1-500lb	RL20000-500lb	RL20001-500lb	STC-500lb	363-500lb	60001-500lb
(H:3.0")				(H:2.5")	(H:2.5")			(H:2.5")	
1Klb	101NH-1Klb	1.0	CGSB-1K	CGSB-1-1K	RL20000-1Klb	RL20001-1Klb	STC-1K	363-1K	60001-1K
(H:3.0")					(H:2.5")			(H:2.5")	
1.5Klb	101NH-1.5Klb	1.0	CGSB-1.5K	CGSB-1-1.5K	RL20000-1.5Klb	RL20001-1.5Klb	STC-1.5K	363-1.5K	60001-1.5K
(H:3.0")					(H:2.5")			(H:2.5")	
2Klb	101NH-2Klb	1.0	CGSB-2K	CGSB-1-2K	RL20000-2Klb	RL20001-2Klb	STC-2K	363-2K	60001-2K
(H:3.0")					(H:2.5")			(H:2.5")	
2.5Klb	101NH-2.5Klb	1.0	CGSB-2.5K	CGSB-1-2.5K	RL20000-2.5Klb	RL20001-2.5Klb	STC-2.5K	363-2.5K	60001-2.5K
(H:3.0")					(H:2.5")			(H:2.5")	
3Klb	101NH-3Klb	1.0	CGSB-3K	CGSB-1-3K	RL20000-3Klb	RL20001-3Klb	STC-3K	363-3K	60001-3K
(H:3.0")				(H:4.0")	(H:4.0")			(H:4.0")	
5Klb	101NH-5Klb	1.5	CGSB-5K	CGSB-1-5K	RL20000-5Klb	RL20001-5Klb	STC-5K	363-5K	60001-5K
(H:4.0")			(H:4.25")		(H:4.25")		(H:4.25")	(H:4.0")	(H:4.25")
10Klb	101NH-10Klb	1.5	CGSB-10K	CGSB-1-10K	RL20000-10Klb	RL20001-10Klb	STC-10K	363-10K	60001-10K
(H:4.0")			(H:4.75")		(H:4.75")		(H:4.75")	(H:4.0")	(H:4.75")
15Klb	101NH-15Klb	3.0	CGSB-15K						60001-15K
20Klb	101NH-20Klb	6.8	CGSB-20K		RL20000-20Klb		STC-20K		60001-20K

100lb-500lb: NTEP 1:4 500 Class III, Single Cell; 1Klb-20Klb: NTEP 1:5 500 Class III, Single Cell

200kg-1.5t: OIML MAA C3, Y=17 000; 2t-10t: OIML MAA C4.5, Y=14 000